

Hand Pump

HYDRAULIC P SERIES

9,5 l Reservoir

Two-Speed Single- and Double-Acting

Best suited for applications where there is little or no free travel.

PUMPS



P300 hand pump and 10 ton cylinders used for a vehicle lift.

- Rugged all metal construction for strength and durability that won't burn through in welding environments.
- Heavy-duty, formed metal handle provides less flex, and less operator fatigue than round or composite handles.
- Convenient fill port allows pumps on P157 and P159 to be filled in a horizontal or vertical position.
- Fill cap seal acts as safety valve to prevent over-pressurizing of reservoir.
- Relief valve inboard of check valve prevents loads from drifting down.
- Large valve knob gives added control for slowly metering loads down.




P157/P159



P300



P460

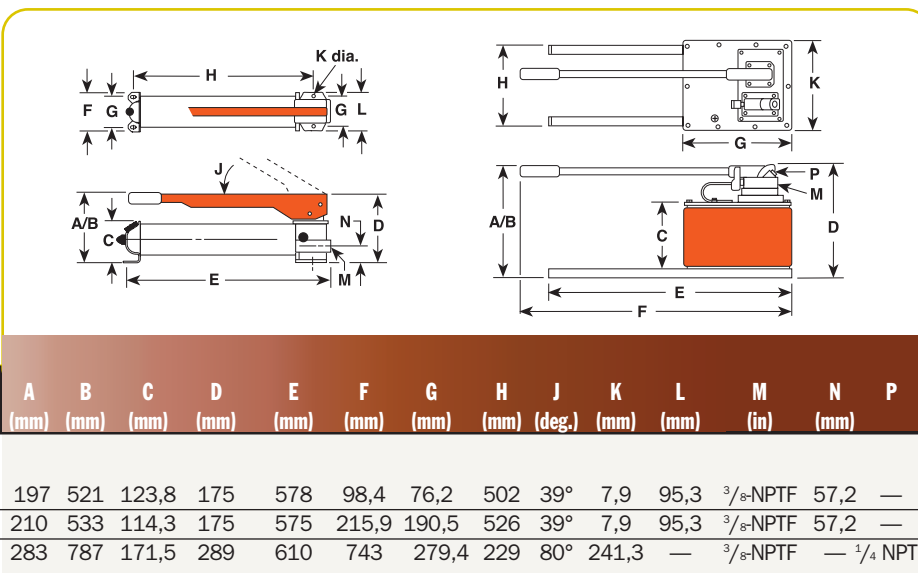

FK59
FK159B

Foot pump conversion kit No. FK59 - Foot pump conversion kit for use on P55/P59 pumps. Wt., 2,7 kg

No. FK159B - Foot pump conversion kit for use on P157/P159 and P300/P300D pumps. Wt., 2,7kg.

For Use With	Order No.	Volume & Pressure				Maximum Pressure (bar)		Reservoir Handle Effort (kg)	Oil Capacity (cm³)	Usable Oil Capacity (cm³)	Oil Port (in)	Product Weight (kg)
		Speed	Volume per Stroke (cm³)	LP	HP	LP	HP					
Single-Acting	P157	2	10,7	2,6	97	700	64	2491	2245	3/8-NPTF	11,8	
	P159	2	42,6	2,6	22	700	64	2491	2245	3/8-NPTF	11,8	
Cylinders*	P300	2	42,6	2,6	22	700	64	5.700	5081	3/8-NPTF	25,1	
	P460	2	120,5	4,6	22	700	41	9.500	7539	3/8-NPTF	24,9	
Double-Acting	P157D	2	10,7	2,6	97	700	64	2491	2245	3/8-NPTF	13,1	
	P159D	2	42,6	2,6	22	700	64	2491	2245	3/8-NPTF	12,7	
Cylinders**	P300D	2	42,6	2,6	22	700	64	5.700	5081	3/8-NPTF	25,9	
	P460D	2	120,5	4,6	22	700	41	9.500	7539	3/8-NPTF	26,3	

LP = Low Pressure
HP = High Pressure

* Pump includes 2-Way Valve
** Pump includes 4-Way Valve